

Date: 2009.8.20

# Scanning Laser Range Finder URG-04LX-UG01 (Simple-URG)

## Specifications

### Asia

联系方式

智美康科技（深圳）有限公司

**ZHIMK TECHNOLOGY (SHEN ZHEN) CO.,LTD.**  
Shenzhen , China 518033

Tel: +86 755 8303 5030/8989 4565 , 13048972929

Email: liulijun18@126.com

[www.zhimk.com.cn](http://www.zhimk.com.cn)

Symbol	Amended Reason			Pages	Date	Corrector	Amendment No
Approved by	Checked by	Drawn by	Designed by	Title	<u>Scanning Laser Range Finder URG-04LX-UG01</u> <b>Specifications</b>		
MORI	MAEDA	YAMAMOTO	MORI				

## 1. General

URG-04LX-UG01 is a laser sensor for area scanning. The light source of the sensor is infrared laser of wavelength 785nm with laser class 1 safety. Scan area is 240° semicircle with maximum radius 4000mm. Pitch angle is 0.36° and sensor outputs the distance measured at every point (683 steps). Laser beam diameter is less than 20mm at 2000mm with maximum divergence 40mm at 4000mm.

Principle of distance measurement is based on calculation of the phase difference, due to which it is possible to obtain stable measurement with minimum influence from object's color and reflectance.

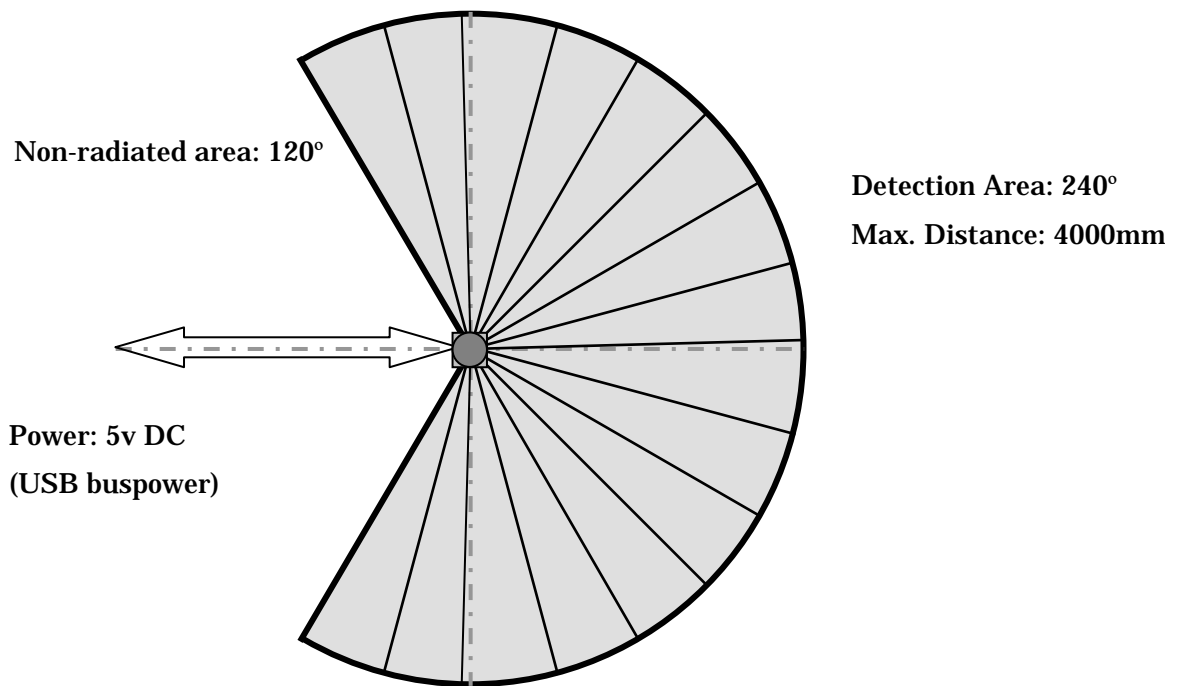


Figure 1

### Note

Figure 1 shows the detectable area for white Kent sheet (70mm×70mm). Detection distance may vary with size and object.

## 2. Important Notice

This sensor is designed for indoor use only.

This sensor is not a safety device/tool

This sensor is not for use in military applications

Read specifications carefully before use.

Title	URG-04LX-UG01 Specification	Drawing No	C-42-3635	2/4
-------	-----------------------------	------------	-----------	-----

### 3. Specifications

Product Name	Scanning Laser Range Finder
Model	URG-04LX-UG01
Light source	Semiconductor laser diode ( $\lambda=785\text{nm}$ ), Laser safety Class 1 (IEC60825-1)
Power source	5V DC $\pm 5\%$ (USB buspower)
Current consumption	500mA or less (Rush current 800mA)
Detection distance	20mm ~ 4000mm
Accuracy	Distance 20mm ~ 1000mm : $\pm 30\text{mm}^*$ Distance 20mm ~ 4000mm : $\pm 3\%$ of measurement*
Resolution	1 mm
Scan Angle	240 °
Angular Resolution	0.36 °
Scan Time	100msec/scan
Interface	USB Version 2.0 FS mode (12Mbps)
Ambient (Temperature/Humidity)	-10 ~ 50°C / 85% or less (without dew and frost)
Preservation temperature	-25 ~ 75°C
Ambient Light Resistance	10000Lx or less
Vibration Resistance	Double amplitude 1.5mm 10 ~ 55Hz, 2 hours each in X, Y and Z direction, and 98m/s <sup>2</sup> 55Hz ~ 150Hz in 2 minutes sweep, 1 hours each in X, Y and Z direction
Impact Resistance	196 m/s <sup>2</sup> , 10 times each in X, Y and Z direction
Protective Structure	Optics : IP64 Case : IP40
Insulation Resistance	10M $\Omega$ for DC 500Vmegger
Weight	Approx. 160 g
Case	Polycarbonate
External dimension (W×D×H)	50×50×70mm (Reference design sheet No.3502)

\*Under standard test conditions with white Kent sheet 70mm×70mm

### 4. Quality reference value

Operating Vibration resistance	19.6m/s <sup>2</sup> , 10Hz ~ 150Hz with 2 minutes sweep, 0.5 hours each in X, Y and Z direction
Operating Impact resistance	49 m/s <sup>2</sup> , 10 times each in X, Y and Z direction
Angular Speed	360 deg/s
Angular Acceleration	$\pi/2$ rad/s <sup>2</sup>
Life	5 years (Varies depending upon the operating conditions)
Sound level	25db or less (at 300mm)
FDA	This product complies with 21 CFR parts 1040.10 and 1040.11. (Accession Number 0521258-002)

Title	URG-04LX-UG01 Specification	Drawing No	C-42-3635	3/4
-------	-----------------------------	------------	-----------	-----

## 5. Interface

CN USB-mini (5 Pin)

Cable is not included. Use commercially available compatible unit.

### Note:

Refer specifications number C-42-3320B for communication protocol (SCIP2.0).

## 6. Notice:

Supply voltage is DC 5Volts. Sensor will damage if high voltage is supplied.

USB buspower may not be sufficient during the start up of URG-04LX-UG01 in some PCs. Use the auxiliary cable supplied with the sensor to avoid the problem.

The maximum data step is 683 points. Sensor's angular resolution is  $0.3515625^\circ$  ( $360^\circ / 1024$  steps) and angular range is  $239.765625^\circ$  ( $((683-1) \times 360 / 1024)$ )

Angular resolution can be specified from the host. Read communication protocol specification (No C-42-3320B) for details.

USB driver is communication device class (CDC) supported by standard operating system. The device is connected as a COM port with the same utility.

Plug and play function is not supported.

## Asia

### 联系方式

智美康科技（深圳）有限公司

**ZHIMK TECHNOLOGY (SHEN ZHEN) CO.,LTD.**  
Shenzhen , China 518033

Tel: +86 755 8303 5030/8989 4565 , 13048972929

Email: liulijun18 @126.com

[www.zhimk.com.cn](http://www.zhimk.com.cn)

Title	URG-04LX-UG01 Specification	Drawing No	C-42-3635	4/4
-------	-----------------------------	------------	-----------	-----