


# MH2115



CE Ex RoHS

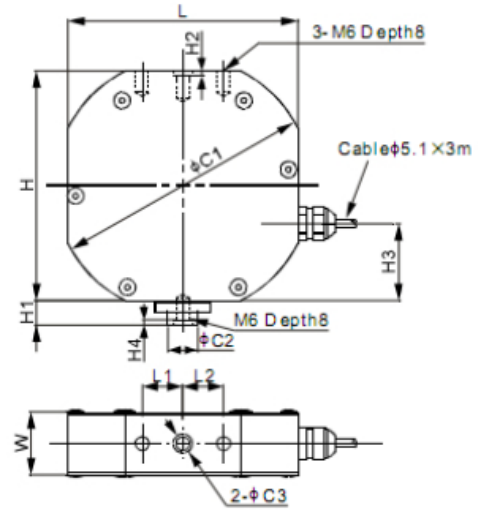

## Products specification

量程	C1	C2	C3	H	H1	H2	H3	H4	L	L1	L2	W
<b>kg/mm</b>												
1...30	95.0	11.0	7.0	85.0	9.0	2.0	28.5	2.0	85.0	15.0	15.0	24.0
<b>lb/inches</b> (由上述尺寸转换)												
2.20...66.14	3.74	0.43	0.28	3.35	0.35	0.08	1.12	0.08	3.35	0.59	0.59	0.94

## 技术参数

相关量程	kg	1; 2; 3; 5; 10; 20; 30
产品毛重	kg/lb	1 / 2
灵敏度	mV/V	2.0 ± 10%
零位输出	mV/V	± 0.05
非线性	%	< ± 0.017
重复性	%	< ± 0.017
滞后误差	%	< ± 0.017
蠕变	%	< ± 0.023
阻抗	Ω	400 ± 25
额定激励电压	V(DC/AC)	10 (15V 最大)
绝缘阻抗	GΩ	> 2 [ 50 VDC ]
正常工作温度范围	°C/°F	-10...40 / 14...104
安全极限载荷	% of full scale	150
破坏极限载荷	% of full scale	300
密封方式		密封, IP65

- E xc+ 红
- Sig+ 绿
- E xc- 黑
- Sig- 白
- 屏蔽线